


PA205

High T° Polyamide Bagging Film

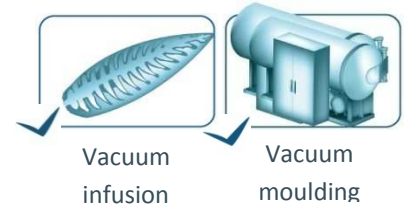

DESCRIPTION

PA205 is a cast polyamide vacuum film recommended for advanced composite fabrication. This film has excellent heat stability and very good chemical properties. This is a styrene resistant film and non porous.

Do not use **PA205** in direct contact with phenol resin.

STORAGE

Keep this film at room temperature and normal hygrometry. Do not expose this film to the day light: **PA 205** is UV sensitive.

CHARACTERISTICS

Raw material	Color	Thick.	Weight	Self Release	Styrene resistant	Max. serv. resistant	Packaging
PA6 resin stab.	Transparent	50μ 75μ	54 g/m ² 81 g/m ²	Yes	Yes	205 °C	Roll

Length	Standard Widths	Pressure	Elasticity		Breaking strength	
			MD	TD	MD	TD
100 & 250 m	80 to 457Cm	7 bars	400 %	425 %	83 MPa	87 MPa

Index C - Application date october 2012