
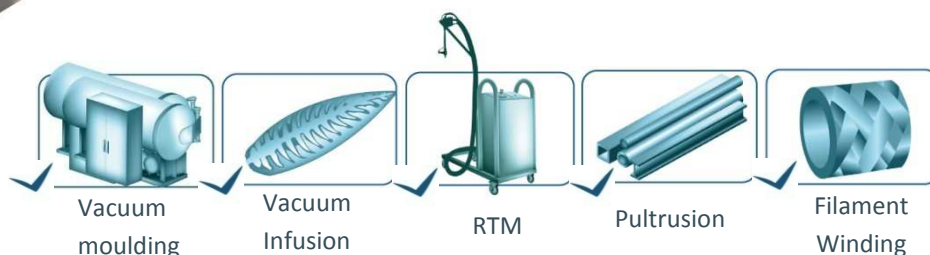


PA85

Standard Polyamide Peel Ply Fabric

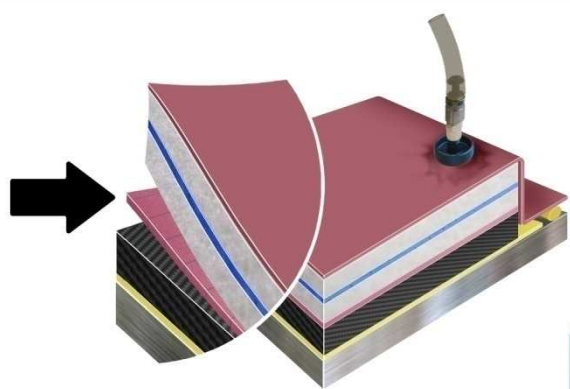

DESCRIPTION

PA85 is the most **standard high tenacity peel ply** made by DIATEX, designed to be used on epoxy and polyester composite systems. The fabric leaves a fine surface impression for priming and secondary bonding. There is no release agent or silicon in the fabric so there is no contamination.

PA85 is not recommended for phenolic systems. Use **PES85**: the polyester version.

STORAGE

Keep this film at room temperature and normal hygrometry.

CHARACTERISTICS

Fiber Type	Color	Thick.	Weight	Use with Phenolic	Treatment	Max. Serv. Temp.	Packaging
Polyamide	White + red stripes	160 μ	82 g/m ²	NO	Scoured & Heat Set	200 °C	Roll

Weave	Extractable Materials	Length	Standard Width	Tape	Elasticity		Breaking Strength	
					Warp	Weft	Warp	Weft
Taffeta	< 0,1 %	100 m / 500 m	1,63m	13 to 1630 mm	30%	30 %	140 daN/5cm	95 daN/5cm

Manufacturer: DIATEX (Made in France)